

Apricus Stainless Steel Tank

Bottom Element



Apricus Stainless Steel tanks are made from a quality stainless steel alloy construction with a 10 year warranty on the cylinder*.

Features and Benefits


- Designed for Australian conditions
- Polyurethane Foam Insulation
- Pickled and Passivated
- COLORBOND™ Casing
- PTR Valve supplied
- Thermostat 60-80°C

Dimensions

| MEASUREMENTS | 250L | 315L |
|----------------------------|-----------------|------|
| Physical Volume (L) | 250 | 315 |
| Dry Weight (kg) | 50 | 80 |
| Construction Material | Stainless Steel | |
| Port Size (") | ¾ | |
| Thermostat Max (°C) | 80 | |
| Element Rating (kW) | 3.6 | |
| Cylinder Warranty (Yrs) | 10* | |
| Safety Valve Setting (kPa) | 850 | |
| Supply Pressure Max (kPa) | 680 | |

Specifications

| TANK SIZE | 250L | 315L |
|----------------------|----------|----------|
| MODEL NUMBER | AP250WSE | AP315WSE |
| Diameter (A) | 620 | 620 |
| Height (B) | 1681 | 2008 |
| HW Outlet (C) | 1454.7 | 1782.7 |
| PTRV Port (D) | 1454.7 | 1782.7 |
| Top Sensor (E) | 842.7 | 1043.3 |
| Solar Return (F) | 643.2 | 819.2 |
| Bottom Sensor (G) | 227.7 | 219.6 |
| Solar Flow (H) | 202 | 202 |
| Cold Water Inlet (I) | 202 | 202 |
| Element Height (J) | 487.3 | 551.8 |

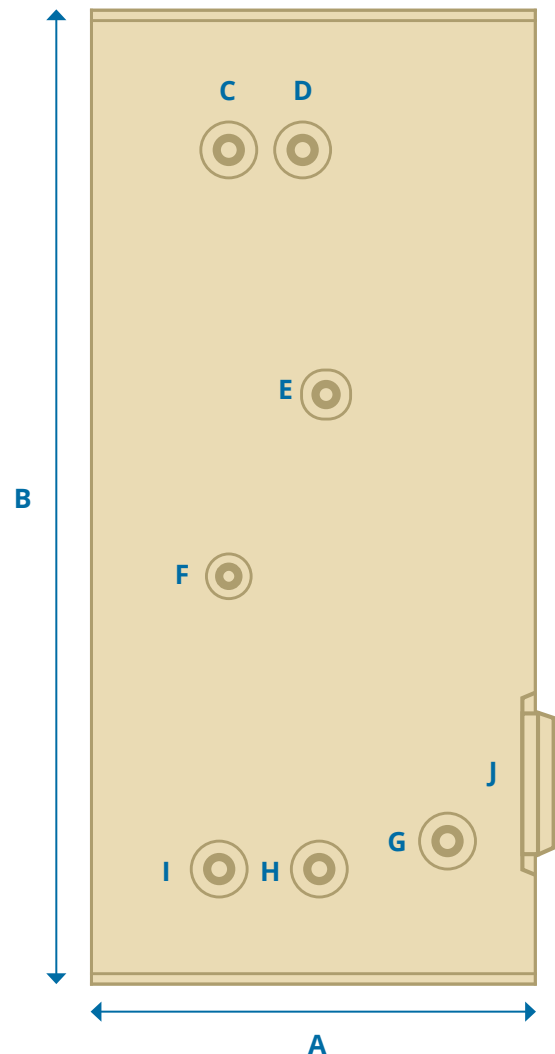

* Please see the Apricus Warranty Policy for full details.

CONTACT US TODAY

For more details please contact your Relationship Manager or call Apricus on **1300 277 428**.

apricus.com.au