

Apricus Stainless Steel Tank

for Gas Boosted systems



Apricus Stainless Steel tanks are made from a quality stainless steel alloy construction with a 10 year warranty on the cylinder*.

Features and Benefits

- Designed for Australian conditions
- Polyurethane Foam Insulation
- Pickled and Passivated
- COLORBOND™ Casing
- PTR Valve supplied


Dimensions

MEASUREMENTS (mm)	250L	315L
Diameter (A)	620	620
Height (B)	1681	2008
HW Outlet (C)	1454.7	1782.7
PTRV Port (D)	1454.7	1782.7
Top Sensor (E)	842.7	1043.3
Solar Return (F)	643.2	819.2
Bottom Sensor (G)	227.7	219.6
Solar Flow (H)	202	202
Cold Water Inlet (I)	202	202

Specifications

TANK SIZE	250L	315L
MODEL NUMBER	AP250WSG	AP315WSG
Physical Volume (L)	250	315
Dry Weight (kg)	50	80
Construction Material	Stainless Steel	
Port Size (")	¾	
Thermostat Max (oC)	80	
Cylinder Warranty (Yrs)	10*	
Safety Valve Setting (kPa)	850	
Supply Pressure Max (kPa)	680	

* Please see the Apricus Warranty Policy for full details.

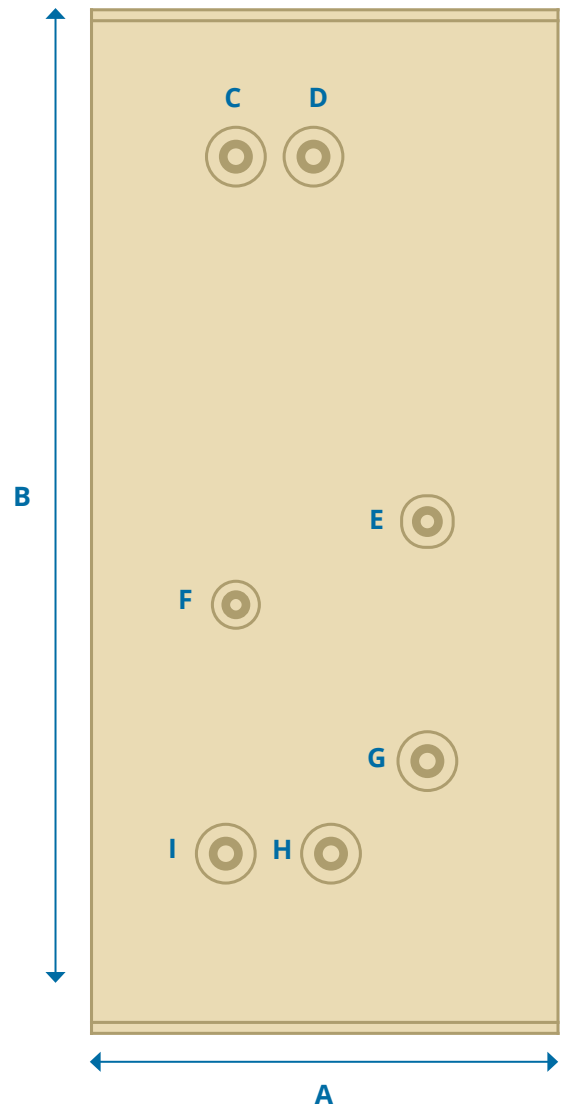

CONTACT US TODAY

For more details please contact your Relationship Manager or call Apricus on **1300 277 428**.

apricus.com.au