

# Apricus Evacuated Tube

## ETC Collectors

Apricus solar collectors use high efficiency twin-glass evacuated tubes to absorb solar energy and convert it into usable heat.

Freeze protected heat pipes transfer heat from within the evacuated tube up to an insulated copper header pipe through which a heat transfer liquid is circulated. Suitable for domestic or commercial applications, Apricus solar collectors maintain strong efficiency levels even in high temperatures and in cold climates.

Apricus offer a range of collector sizes to suit all needs, from 1-2 person units to large industrial projects.

### Features and Benefits

- Designed for Australian conditions
- 15 year warranty on solar collectors\*

### Specifications


NUMBER OF TUBES MODEL NUMBER	22T ETC-22T	30T ETC-30T	44T ETC-44T
Gross Area (m <sup>2</sup> )	3.28	4.4	6.56
Aperture Area (m <sup>2</sup> )	2.07	2.84	4.14
Width (mm)*	1636	2196	3272*
Length (mm)	2005	2005	2005
Depth (mm)^	136	136	136
Dry Weight (kg)#	71.3	95	142.6
Fluid Capacity (mL)	600	790	1200
Peak Power (kW)	1.477	2.014	2.954
Minimum Operating Temperature (°C)	-15 (with frost protection)		
Warranty Period	15 years		
Minimum Pitch (°)	20		
Maximum Pitch (°)	45		
Max Operating Pressure (kPa)	800		

\* See Apricus warranty policy for full details.

^ Note: Depth does not include mounting frame.

# Note: Dry weight is not inclusive of aluminium ETC frame weight.

+ Assumes 2x 22T collectors directly adjacent to each other, spacing between two collector groups not taken into account.

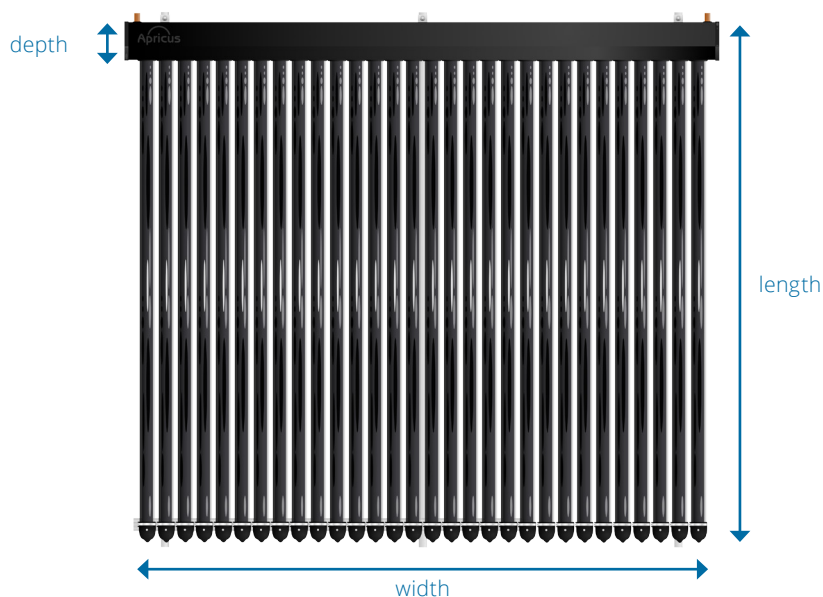

## CONTACT US TODAY

For more details please contact your Relationship Manager or call Apricus on **1300 277 428**.