

Apricus Glass Lined Tank

for Gas Boosted systems

Apricus tanks are available in a variety of sizes to ensure the ideal hot water solution for your home.

Features and Benefits

- Designed for Australian conditions
- 10 year warranty on cylinder*
- Quality vitreous enamel construction
- Polyurethane Foam Insulation
- PTR Valve supplied


Dimensions

MEASUREMENTS (mm)	250L	315L	400L
Diameter (A)	617	617	705
Height (B)	1445	1765	1704
HW Outlet (C)	1211	1531	1445
PTRV Port (D)	1211	1531	1445
Top Sensor (E)	992	1258	1208
Solar Return (F)	1211	1531	1445
Bottom Sensor (G)	457	551	554
Solar Flow (H)	197	197	219
Cold Water Inlet (I)	197	197	219

Specifications

TANK SIZE	250L	315L	400L
MODEL NUMBER	AP250GLG	AP315GLG	AP400GLG
Physical Volume (L)	259	323	420
Dry Weight (kg)	71	92	116
Construction Material	Vitreous Enamel		
Port Size (")	¾		
Cylinder Warranty (Yrs)	10*		
Safety Valve Setting (kPa)	850		
Supply Pressure Max (kPa)	680		

*Please see the Apricus Warranty Policy for full details

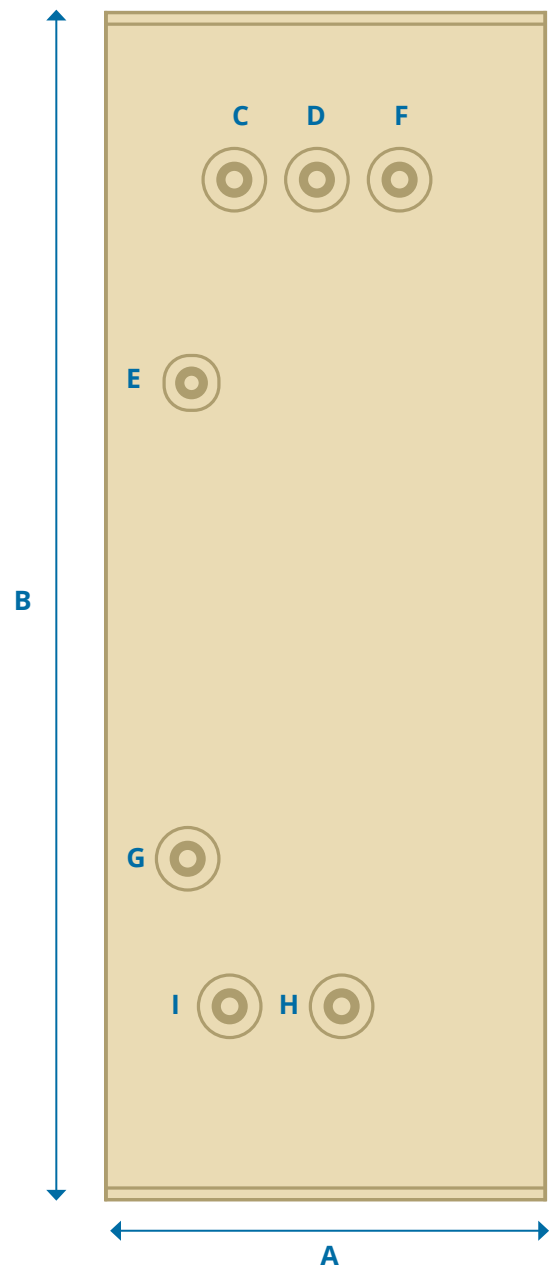

Note this diagram is not to scale and is for indication purposes only.

CONTACT US TODAY

For more details please contact your Relationship Manager or call Apricus on **1300 277 428**.