

# Apricus Glass Lined Electric Tank

## Bottom Element



Apricus electric hot water tanks are designed to provide you with reliable hot water year round. They can be used as a standalone electric water heater, ready for the addition of solar when you decide make the switch.

### Features and Benefits

- Designed for Australian conditions
- 10 year warranty on cylinder\*
- Polyurethane Foam Insulation
- Quality vitreous enamel construction
- PTR Valve supplied


### Dimensions

MEASUREMENTS (mm)	250L	315L	400L
Diameter (A)	617	617	705
Height (B)	1445	1765	1704
HW Outlet (C)	1211	1531	1445
PTRV Port (D)	1211	1531	1445
Top Sensor (E)	786	872	809
Solar Return (F)	567	566	536
Bottom Sensor (G)	347	355	340
Solar Flow (H)	197	197	219
Cold Water Inlet (I)	197	197	219
Element Height (J)	167	167	167

### Specifications

TANK SIZE	250L	315L	400L
MODEL NUMBER	AP250SRT	AP315SRT	AP400SRT
Physical Volume (L)	259	323	420
Dry Weight (kg)	71	92	116
Construction Material	Vitreous Enamel		
Anode Material	Magnesium		
Port Size (")	¾		
Thermostat Max (°C)	70		
Element Rating (kW)	3.6		
Cylinder Warranty (Yrs)	10*		
Safety Valve Setting (kPa)	850		
Supply Pressure Max (kPa)	680		

\*Please see the Apricus Warranty Policy for full details

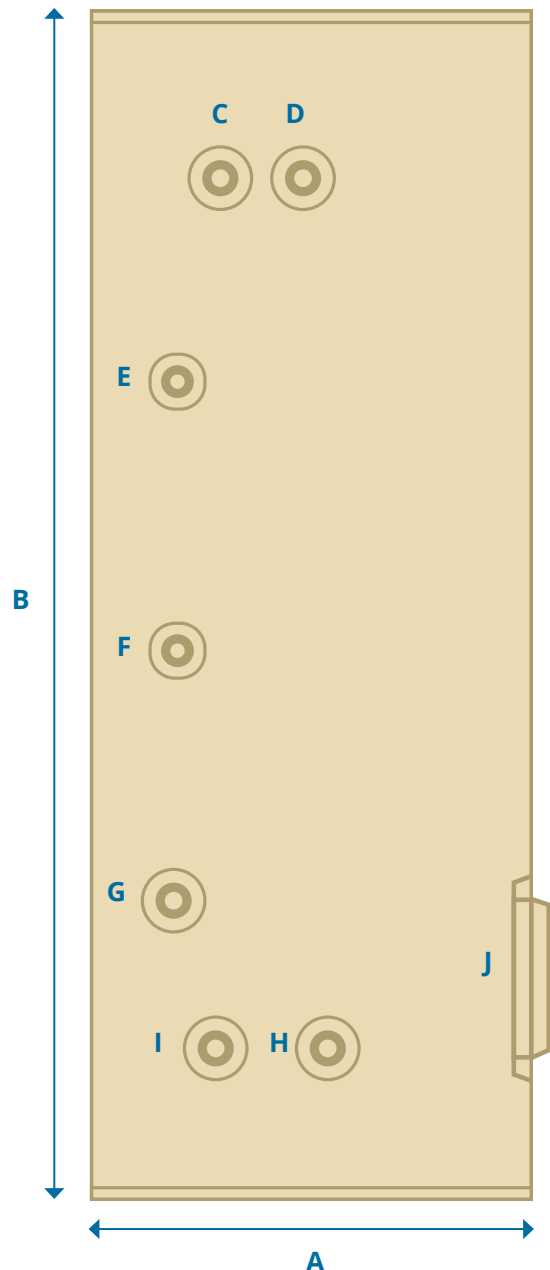

Note this diagram is not to scale and is for indication purposes only.

## CONTACT US TODAY

For more details please contact your Relationship Manager or call Apricus on **1300 277 428**.

[apricus.com.au](http://apricus.com.au)